


SMA Adjustable Phase Shifters | 720° Phase Range | DC–18 GHz |  
40°/GHz Precision

P/N: PS-18G-SMF-720



Dimensions are in mm

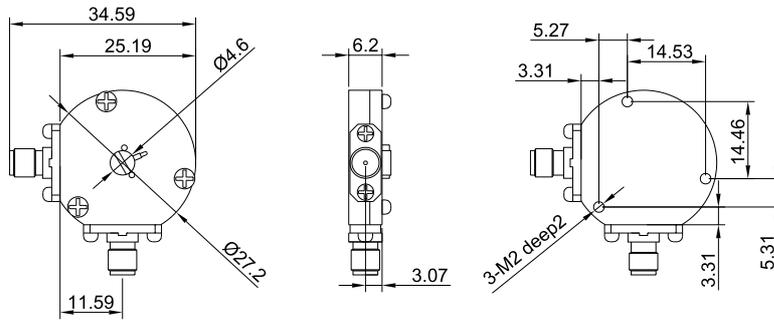

## Product Configuration

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

## Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	≤2.5
Insertion Loss	≤2.4dB
Adjustable Phase	720°

SMA Adjustable Phase Shifters | 720° Phase Range | DC–18 GHz |  
40°/GHz Precision

P/N: PS-18G-SMF-720

## Environmental Specifications

Operating Temperature Range

-55 °C to +85 °C