
# Datasheet

## SMA Adjustable Phase Shifters | 720° Phase Range | DC–18 GHz | 40°/GHz Precision

P/N: PS-18G-SMF-720




Dimensions are in mm

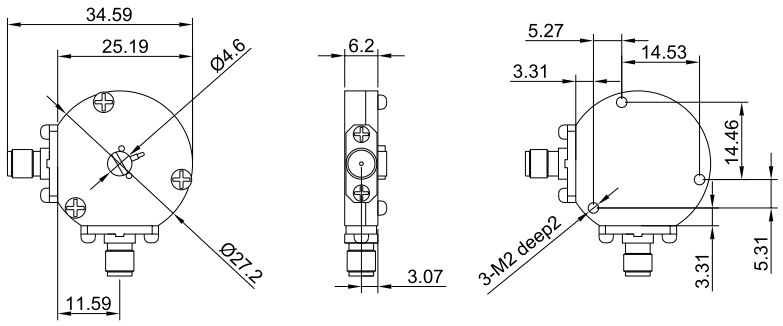


## Product Configuration

| | |
|---|---|
| Connector-In Series | SMA |
| Connector-In Polarity | Standard |
| Connector-In Gender | Female |
| Connector-In Impedance (Ohm) | 50 |
| Connector-Out Series | SMA |
| Connector-Out Polarity | Standard |
| Connector-Out Gender | Female |
| Connector-Out Impedance (Ohm) | 50 |

## Electrical Specifications

| | |
|---|---|
| Frequency | DC - 18GHz |
| VSWR / Return Loss | ≤2.5 |
| Insertion Loss | ≤2.4dB |
| Adjustable Phase | 720° |


Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

SMA Adjustable Phase Shifters | 720° Phase Range | DC–18 GHz | 40°/GHz Precision

P/N: PS-18G-SMF-720

## Enviromental Specifications

| | |
|---|---|
| Operating Temperature Range | -55 ºC to +85 ºC |