


QMA Female to SMA Female Straight Adapter | DC-12.7GHz

P/N: QMA/SMA-KK



Dimensions are in mm

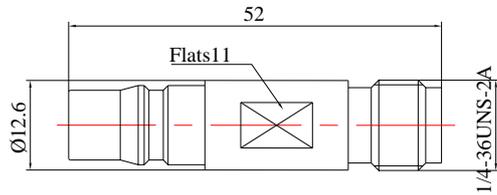

Product Configuration

	Connector 1	Connector 2
Connector Series	QMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel
Body Style	Straight	Straight
Mount Method		None

Electrical Specifications

Frequency	DC - 12.7GHz
VSWR / Return Loss	1.25
Insertion Loss	$\leq 0.1 \times \text{Sqrt.}(f_GHz)$

Mechanical Data

Min. Mating Cycles	≥ 500
--------------------	------------

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A