


SMA Female Reverse Polarity for .086" Series Cable | DC to 6GHz

RPSMA-KB2



Dimensions are in mm

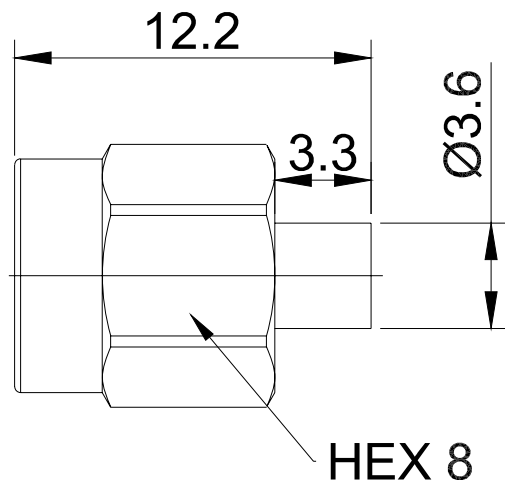

Product Configuration

Connector Series	SMA
Connector Polarity	Reverse Polarity
Connector Gender	Female
Body Style	Straight
Termination Type	Coax
Connector Impedance (Ohm)	50
Mount Method	None

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Nickel

Electrical Specifications

Frequency	DC - 6GHz
VSWR / Return Loss	1.25
Insertion Loss	≤ 0.10 x Sqrt.(f_GHz)

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A