
Flexi RF
Reliable RF Components In Stock

Datasheet

SMA Reverse Polarity Female to SMA Reverse Polarity Female Straight Adapter | DC to 18GHz

P/N: FR1-RPSMA-KFKG

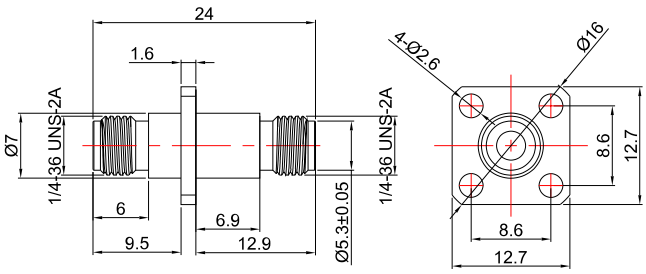

Dimensions are in mm



Product Configuration

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Reverse Polarity	Reverse Polarity
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated
Mount Method	4 Hole Flange	4 Hole Flange

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.15
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

Flexi RF Inc

(650)880-9199

20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014

sales@flexirf.com

www.flexirf.com