
Flexi RF
Reliable RF Components In Stock

Datasheet

TNC Reverse Polarity Male to SMA Male Straight Adapter | DC to 3GHz

P/N: FR1-RPTNC/SMA-JJ



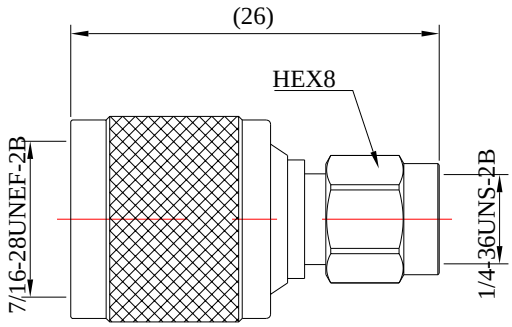

Dimensions are in mm

Product Configuration

	Connector 1	Connector 2
Connector Series	TNC	SMA
Connector Polarity	Reverse Polarity	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold
Mount Method		None

Electrical Specifications

Frequency	DC - 3GHz
VSWR / Return Loss	1.25
Insertion Loss	≤ 0.10 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC
MIL/STD	N/A

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com