


Datasheet

SMA Male to 2.92mm Male Adapter, DC - 18GHz

FR1-SMA/2.92-JJS-A



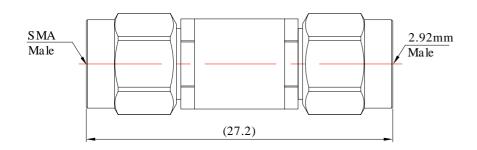

Dimensions are in mm

Product Configuration

Connector 1 Series **SMA** Connector 1 Polarity Standard Connector 1 Gender Male Connector 1 Impedance (Ohm) 50 Connector 1 Mount Method None Connector 2 Series 2.92mm Connector 2 Polarity Standard Connector 2 Gender Male Connector 2 Impedance (Ohm) 50 Connector 2 Mount Method None Body Style Straight

Mechanical Data

Connector 1 Body Material Stainless Steel
Connector 1 Body Plating Passivated
Connector 2 Body Material Stainless Steel
Connector 2 Body Plating Passivated
Min. Mating Cycles ≥500
Weight 7.2 g

Electrical Specifications

Frequency DC-18GHz VSWR 1.15

Insertion Loss ≤0.1 xSqt.(f GHz)

Enviromental Specifications

RoHS Compliant Yes

Operating Temperature -55 °C to +165 °C

Range

MIL/STD N/A

Flexi RF Inc

(I) (650)880-9199

sales@flexirf.com

(9) 3070 Scott Blvd, Santa Clara, CA 95054-3325

@ www.flexirf.com