


SMA Female to GPO(SMP) Male 2 Hole Flange Straight Adapter | DC-18GHz P/N: SMA/GPO-KFJ-F



Dimensions are in mm

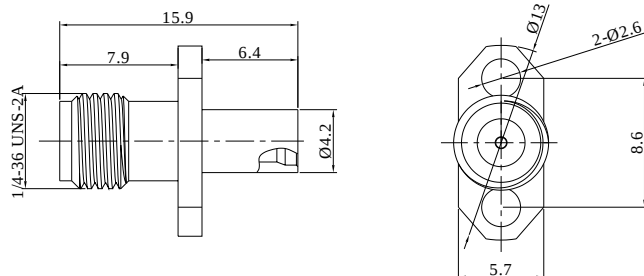

Product Configuration

	Connector 1	Connector 2
Connector Series	SMA	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold
Body Style	Straight	Straight
Mount Method	2 Hole Flange	2 Hole Flange

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.45
Insertion Loss	$\leq 0.1 \times \text{Sqrt.}(f_GHz)$

Mechanical Data

Min. Mating Cycles	≥ 500
--------------------	------------

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A