


SMA Female to GPO(SMP) Female 2 Hole Flange Straight Adapter | DC-18GHz

P/N: SMA/GPO-KFKG



Dimensions are in mm

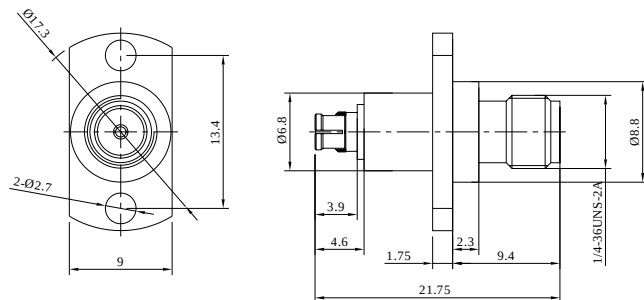

Product Configuration

	Connector 1	Connector 2
Connector Series	SMA	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold
Body Style	Straight	Straight
Mount Method	2 Hole Flange	2 Hole Flange

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.35
Insertion Loss	$\leq 0.1 \times \text{Sqrt.}(f_GHz)$

Mechanical Data

Min. Mating Cycles	≥ 500
--------------------	------------

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A

Test Report

