
Flexi RF
Reliable RF Components In Stock

Datasheet

SMA Female to MMCX Male Straight Adapter | DC-6GHz

P/N: FR1-SMA/MMCX-KJ

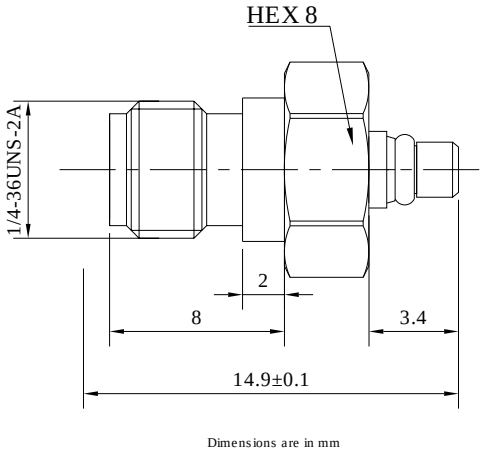

Dimensions are in mm



Product Configuration

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold
Mount Method		None

Electrical Specifications

Frequency	DC - 6GHz
VSWR / Return Loss	1.2
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC
MIL/STD	N/A

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com