


Datasheet

P/N: FR1-SMA/SSMC-KJ

SMA Female to SSMC Male Straight Adapter | DC-6GHz



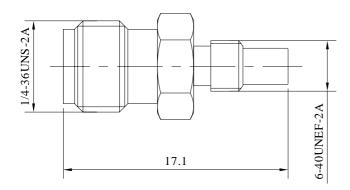

Dimensions are in mm

Product Configuration		
	Connector 1	Connector 2
Connector Series	SMA	SSMC
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold
Mount Method		None

Electrical Specifications

DC - 6GHz Frequency

VSWR / Return Loss 1.2

Insertion Loss \leq 0.1 x Sqrt.(f_GHz)

Mechanical Data

≥500 Min. Mating Cycles

Enviromental Specifications

RoHS Compliant

-55 °C to +165 °C Operating Temperature Range

MIL/STD N/A

Flexi RF Inc