


## SMA Fixed Attenuator | DC - 27GHz | 2Watts

P/N: FR4-SMA-CA1XXE-27G

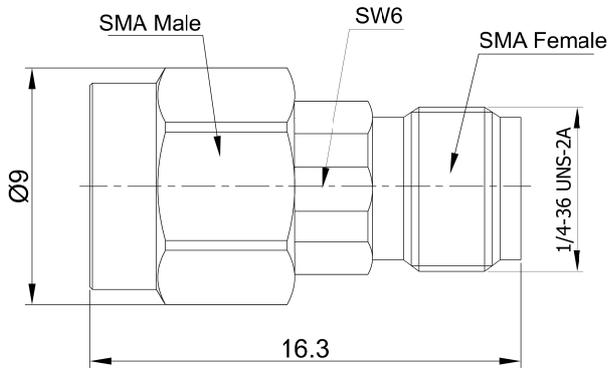

Dimensions are in mm

### Electrical Performance Parameter Table

Attenuation Value (dB)	Frequency	Attenuation Accuracy	VSWR	Average Power (W)
1	DC-27GHz	-0.6/+0.6	<1.25	2
2	DC-27GHz	-0.6/+0.6	<1.25	2
3	DC-27GHz	-0.6/+0.6	<1.25	2
4	DC-27GHz	-0.6/+0.6	<1.25	2
5	DC-27GHz	-0.6/+0.6	<1.25	2
6	DC-27GHz	-0.6/+0.6	<1.25	2
7	DC-27GHz	-0.6/+0.6	<1.25	2
8	DC-27GHz	-0.6/+0.6	<1.25	2
9	DC-27GHz	-0.6/+0.6	<1.25	2
10	DC-27GHz	-0.6/+0.6	<1.25	2
20	DC-27GHz	-0.6/+0.6	<1.25	2
30	DC-27GHz	-0.6/+0.6	<1.25	2

## SMA Fixed Attenuator | DC - 27GHz | 2Watts

P/N: FR4-SMA-CA1XXE-27G

### Product Configuration

	Connector-In	Connector-Out
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

### Mechanical Data

Weight (g)	3.9 g
Cryogenic	No

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C
MIL/STD	N/A

### Test Data

