


SMA Fixed Attenuator | DC - 27GHz | 2Watts

P/N: SMA-CA1XXE-27G



Dimensions are in mm

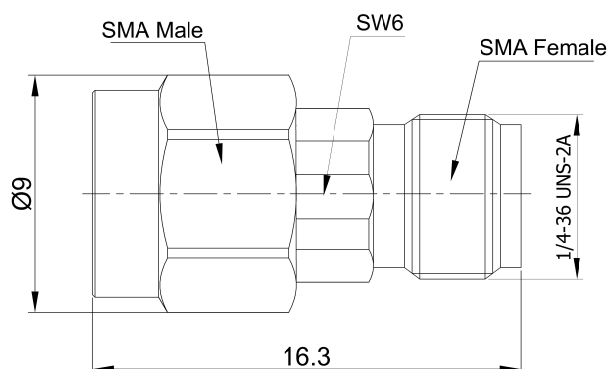

Electrical Performance Parameter Table

Attenuation Value (dB)	Frequency	Attenuation Accuracy	VSWR	Average Power (W)
1	DC-27GHz	-0.6/+0.6	<1.25	2
2	DC-27GHz	-0.6/+0.6	<1.25	2
3	DC-27GHz	-0.6/+0.6	<1.25	2
4	DC-27GHz	-0.6/+0.6	<1.25	2
5	DC-27GHz	-0.6/+0.6	<1.25	2
6	DC-27GHz	-0.6/+0.6	<1.25	2
7	DC-27GHz	-0.6/+0.6	<1.25	2
8	DC-27GHz	-0.6/+0.6	<1.25	2
9	DC-27GHz	-0.6/+0.6	<1.25	2
10	DC-27GHz	-0.6/+0.6	<1.25	2
20	DC-27GHz	-0.6/+0.6	<1.25	2
30	DC-27GHz	-0.6/+0.6	<1.25	2

SMA Fixed Attenuator | DC - 27GHz | 2Watts

P/N: SMA-CA1XXE-27G

Product Configuration

	Connector-In	Connector-Out
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Mechanical Data

Weight (g)	3.9 g
Cryogenic	No

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C
MIL/STD	N/A

Test Data

