
Flexi RF
Reliable RF Components In Stock

Datasheet

SMA Male Connector for RG405 Flexible Cables | DC - 26.5GHz

P/N: FR2-SMA-JB2S-4



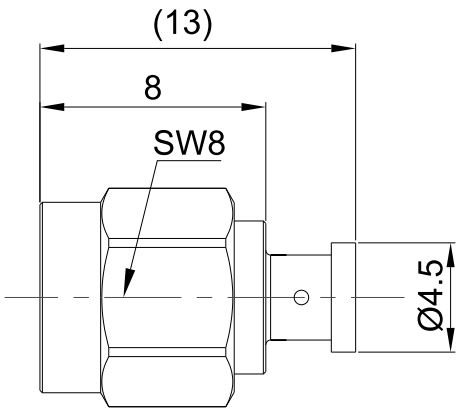

Dimensions are in mm

Product Configuration

Body Style	Straight
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Male
Termination Type	Coax
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 26.5GHz
VSWR / Return Loss	1.25 to 18 GHz
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +165°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com