


## SMA Male to SMA Female Adjustable Phase Trimmer | 100 Degrees Phase Range | DC - 18GHz

P/N: SMA-JPK



Dimensions are in mm

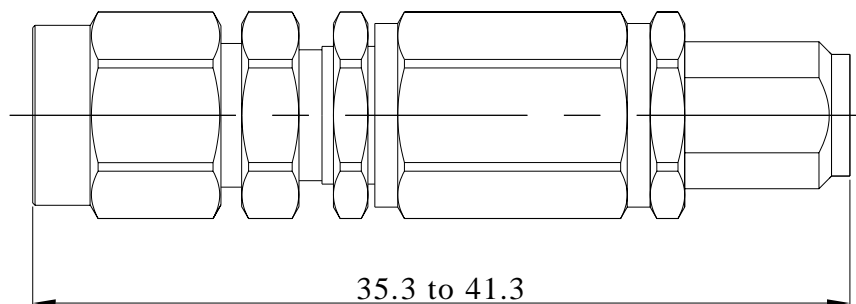

### Product Configuration Cable

Connector-In Series	SMA
Connector-In Polarity	Standard
Connector-In Gender	Male
Connector-In Impedance (Ohm)	50
Connector-Out Series	SMA
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

### Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.5
Insertion Loss	$\leq 0.05 \times \text{Sqrt.}(f\_GHz)$
Adjustable Phase	100°

**SMA Male to SMA Female Adjustable Phase Trimmer | 100 Degrees  
Phase Range | DC - 18GHz**

**P/N: SMA-JPK**

## Mechanical Data

Weight (g)	8.6 g
Body Material	Stainless Steel
Body Plating	Passivated

## Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C