


**SMA Female RF Load Termination Up To 18 GHz | 1 Watts |  
Passivated Stainless Steel**

**P/N: SMA-K-03S**



Dimensions are in mm

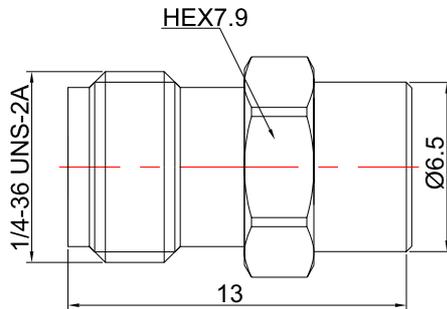

**Product Configuration**

Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

**Electrical Specifications**

Frequency	DC - 18GHz
VSWR / Return Loss	1.15
Power, Max Input (Watts)	1

**Mechanical Data**

Min. Mating Cycles	≥500
Weight	2.61 g
Body Material	Stainless Steel
Body Plating	Passivated

**Environmental Specifications**

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C
MIL/STD	N/A

**Test Report**

