
Datasheet

SMA Female RF Load Termination Up To 18 GHz | 1 Watts | Passivated Stainless Steel

P/N: SMA-K-03S



Dimensions are in mm

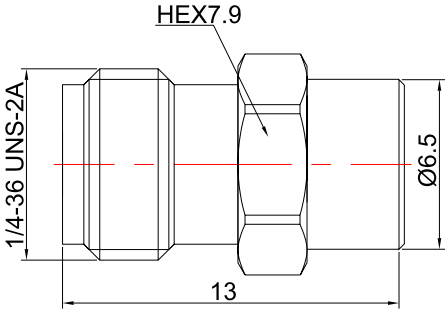

Product Configuration

Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.15
Power, Max Input (Watts)	1


Mechanical Data


Min. Mating Cycles	≥500
Weight	2.61 g
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC
MIL/STD	N/A

Test Report

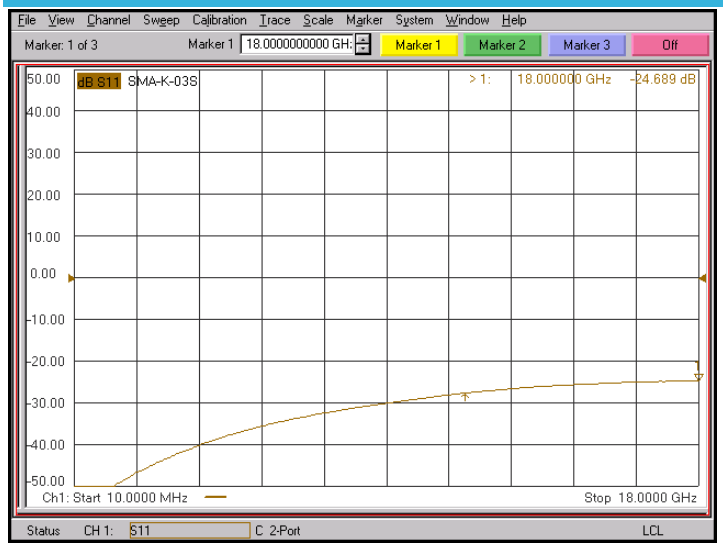

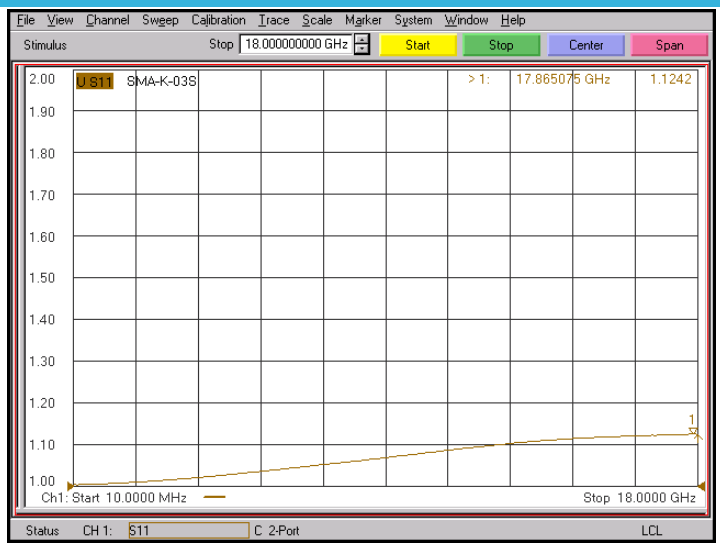

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com