


SMA Female Connector Field Replaceable with 4 Hole Flange | Hole Spacing 8.6mm **SMA-KFD0151**  
| Acceptable Pin Diameter 0.51mm | DC - 26.5GHz

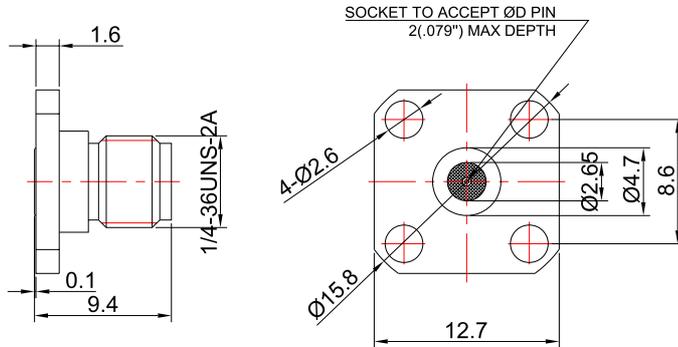

For glass-bead of 0.51mm pin diameter  
Dimensions are in mm

**Product Configuration**

Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	4 Hole Flange

**Mechanical Data**

Min. Mating Cycles	≥500
Weight (g)	2.8 g
Body Material	Stainless Steel
Body Plating	Passivated

**Electrical Specifications**

Frequency	DC - 26.5GHz
VSWR / Return Loss	1.15
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

**Environmental Specifications**

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A