Flexi RF

Reliable RF Components In Stock

Datasheet

SMA Female Connector Solderless End Launch for PCB, Center Pin Diameter 0.3mm, DC - 26.5GHz

P/N: FR2-SMA-KFD0830

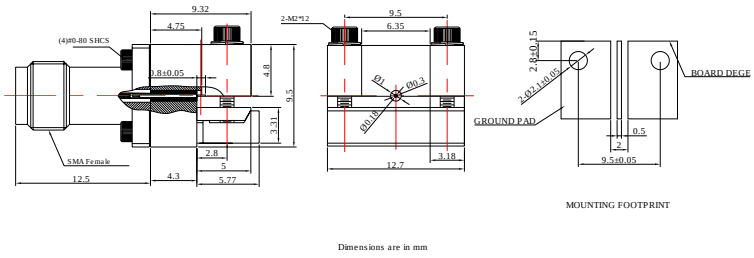

Product Configuration

Body Style	Straight
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	End Launch

Electrical Specifications

Frequency	DC-26.5GHz
VSWR	1.25
Insertion Loss	≤0.05 xSqt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Weight	9.5 g
Body Material	Brass
Body Plating	Tri-Metal

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165 ºC
MIL/STD	N/A

Flexi RF Inc

(650)880-9199

3070 Scott Blvd, Santa Clara, CA 95054-3325

sales@flexirf.com

www.flexirf.com