


SMA Female to SMA Female Adapter with 4 Hole Flange | DC - 26.5GHz

SMA-KFKG



Dimensions are in mm

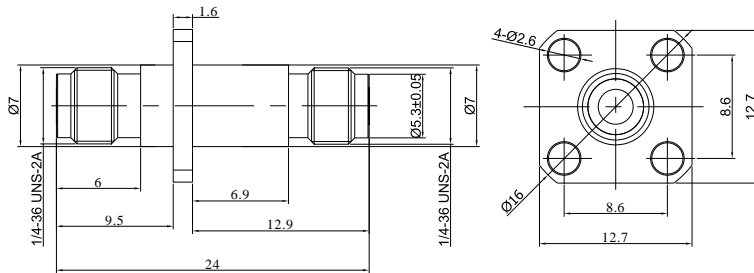

Product Configuration

| | |
|-----------------------------|---------------|
| Connector 1 Series | SMA |
| Connector 1 Polarity | Standard |
| Connector 1 Gender | Female |
| Connector 1 Impedance (Ohm) | 50 |
| Connector 1 Mount Method | 4 Hole Flange |
| Connector 2 Series | SMA |
| Connector 2 Polarity | Standard |
| Connector 2 Gender | Female |
| Connector 2 Impedance (Ohm) | 50 |
| Connector 2 Mount Method | 4 Hole Flange |

Mechanical Data

| | |
|---------------------------|-----------------|
| Connector 1 Body Material | Stainless Steel |
| Connector 1 Body Plating | Passivated |
| Connector 2 Body Material | Stainless Steel |
| Connector 2 Body Plating | Passivated |
| Min. Mating Cycles | ≥500 |
| Weight (g) | 5.2 g |

Electrical Specifications

| | |
|--------------------|-------------------------------|
| Frequency | DC-26.5GHz |
| VSWR / Return Loss | 1.1 to 18 GHz, 1.2 to 26.5GHz |
| Insertion Loss | ≤0.1 xSqt.(f_GHz) |

Enviromental Specifications

| | |
|-----------------------------|-------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -55 °C to +165 °C |
| MIL/STD | N/A |