


SMA Female Connector Vertical Launch Suit for PCB | Bulkhead Mount | Length of **SMA-KHD104-1**  
Center Pin 0.9mm | DC - 12.4GHz

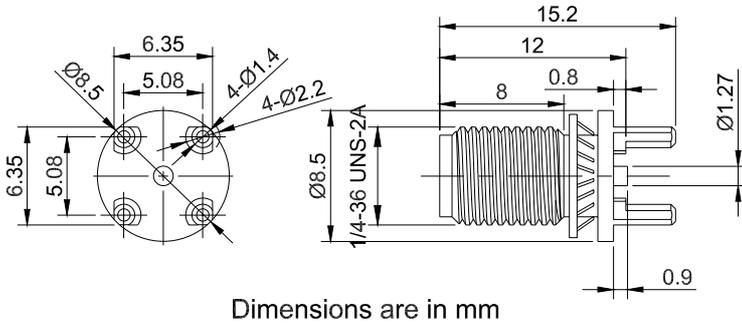

### Product Configuration

Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	End Launch

### Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

### Electrical Specifications

Frequency	DC - 12.4GHz
VSWR / Return Loss	≤1.2
Insertion Loss	≤ 0.03 x Sqrt.(f_GHz)

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45°C to +125°C