
Flexi RF
Reliable RF Components In Stock


Datasheet

SMA Female Connector End Launch Suit for PCB Thickness 2.0mm Length of Center Pin 1.9mm | DC - 18GHz

P/N: FR2-SMA-KHD201A

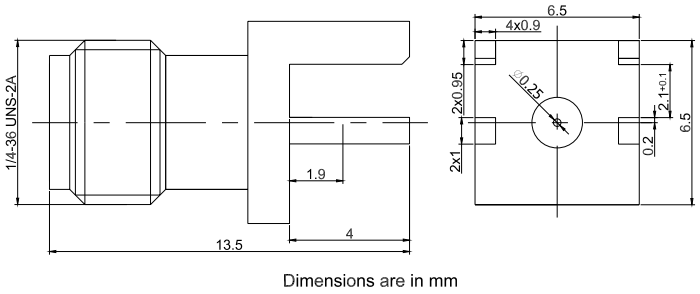

Dimensions are in mm



Product Configuration

Body Style	Straight
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.25
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Weight	2 g
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +155°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com