


SMA Female End Launch Connector, DC - 26.5GHz

P/N: FR2-SMA-KHD26

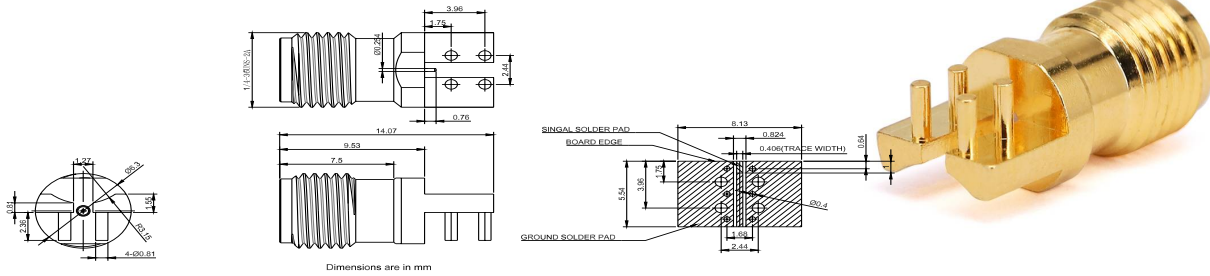

Product Configuration

Body Style	Straight
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	End Launch

Electrical Specifications

Frequency	DC-26.5GHz
VSWR	1.4
Insertion Loss	$\leq 0.05 \times \text{Sq.}(f_GHz)$

Mechanical Data

Mating Cycles, Min	≥ 500
Weight	1.37 g
Body Material	Brass
Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A