
Datasheet

SMA Female Bulkhead Mount Connector for PCB | DC - 18GHz

SMA-KYHD321



Dimensions are in mm

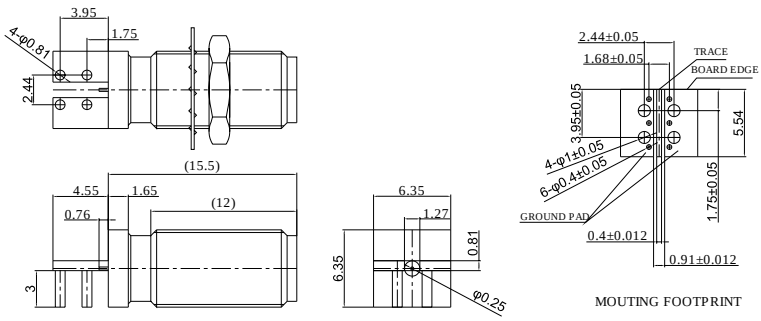

Product Configuration

Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	Bulkhead

Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	3.14 g
Body Material	Brass
Body Plating	Gold

Electrical Specifications

Frequency	DC - 26.5GHz
VSWR / Return Loss	1.3 to 18GHz,1.38 to 26.5GHz
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC
MIL/STD	N/A

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com