
Flexi RF
Reliable RF Components In Stock

Datasheet

GP3PO(SMPS) Male PCB Connector | DC-100GHz

P/N: FR2-SMPS-JHD1PI

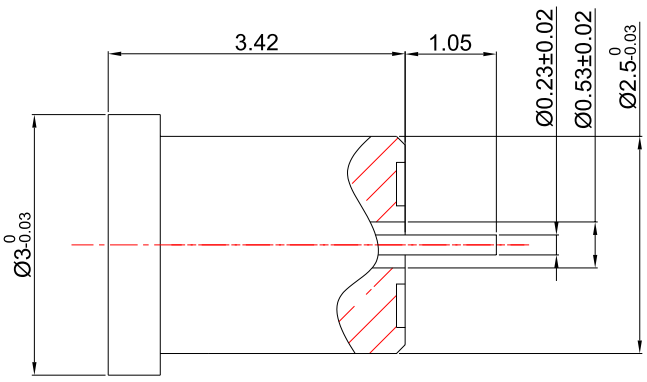

Dimensions are in mm



Product Configuration

Body Style	Straight
Connector Series	G3PO(SMPS)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	End Launch

Electrical Specifications

Frequency	DC - 100GHz
VSWR / Return Loss	1.7
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +125°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com