


SPDT Electromechanical Relay Failsafe Switch | 2.92mm Female | DC - 40GHz | 12V

P/N: SPDT40G12V



Dimensions are in mm

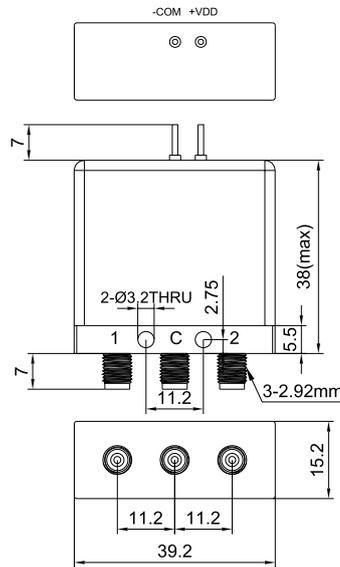

Product Configuration

Control Interface	Solder Pin
Switch Type	Terminated
Switch Design	SPDT
Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

Return Loss or VSWR Input	1.9
Frequency Range	DC-40GHz
Isolation Min.(dB)	50
Insertion Loss, Max Input	0.2 to 6GHz, 0.4 to 18GHz, 0.9 to 40GHz
Maximum Speed,ms	15
Control Volt (Volts)	12
Current, DC (mA)	104

Mechanical Data

Min. Mating Cycles	≥500
Colour	Black

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-25°C to +65°C