
# SSMA Female to SSMA Female 4 Holde Flange Straight Precision Adapter | DC to 30GHz

P/N: FR1-SSMA-KFKG



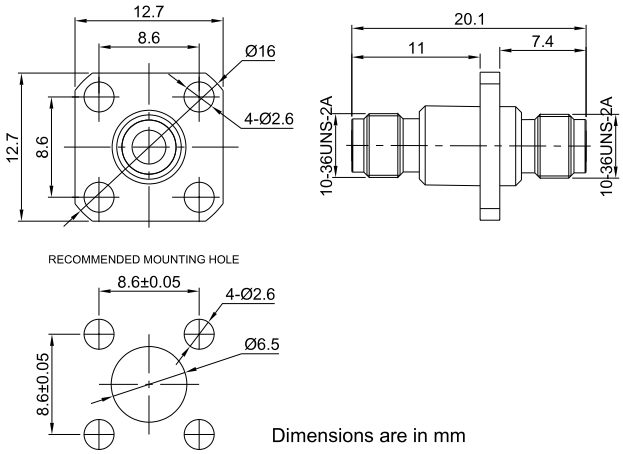


## Product Configuration

| | Connector 1 | Connector 2 |
|---|---|---|
| Connector Series | SSMA | SSMA |
| Connector Polarity | Standard | Standard |
| Connector Gender | Female | Female |
| Connector Impedance (Ohm) | 50 | 50 |
| Body Style | Straight | Straight |
| Mount Method | 4 Holde Flange | 4 Holde Flange |

## Electrical Specifications

| | |
|---|---|
| Frequency | DC - 30GHz |
| VSWR / Return Loss | 1.3 |
| Insertion Loss | ≤ 0.05×Sqrt.(f_GHz) |

## Enviromental Specifications

| | |
|---|---|
| RoHS Compliant | Yes |
| Operating Temperature Range | -65°C to +85°C |