


P/N: VNA-24F24M-630

2.4mm NMD Female to 2.4mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 50GHz

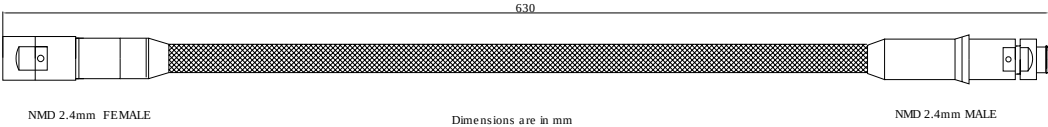

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm NMD	2.4mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Impedance (Ohm)	50
Cable Diameter (mm)	15.2
Minimum Bend Radius (mm)	50
Shielding Effectiveness	>100dB to 18GHz

P/N: VNA-24F24M-630

2.4mm NMD Female to 2.4mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable |
With Armor | DC - 50GHz

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
500	± 5	DC-50GHz	1.35 to 50GHz	≤ 3.2 dB

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 °C to +40 °C
MIL/STD	N/A