


**P/N: VNA-24F24M-630**

**2.4mm NMD Female to 2.4mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 50GHz**

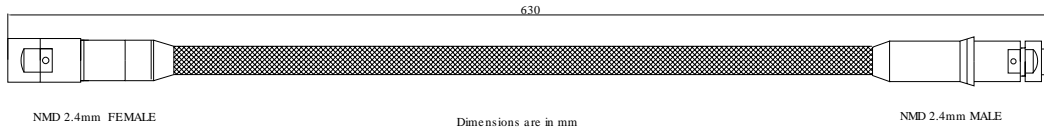

### Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm NMD	2.4mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

### Cable Configuration

Cable Impedance (Ohm)	50
-----------------------	----

P/N: VNA-24F24M-630

2.4mm NMD Female to 2.4mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable |  
With Armor | DC - 50GHz

## Electrical Data

## Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

0 °C to +40 °C

MIL/STD

N/A