
P/N: VNA-292F292M-630

2.92mm NMD Female to 2.92mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 40GHz



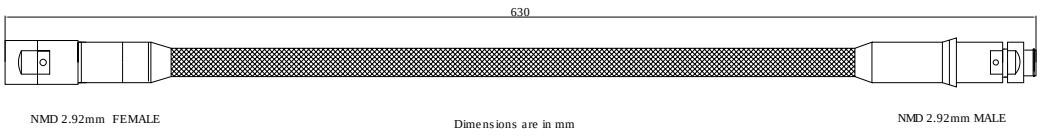

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm NMD	2.92mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Cable Configuration

Cable Impedance (Ohm)	50

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: VNA-292F292M-630

2.92mm NMD Female to 2.92mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 40GHz

Electrical Data

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 ºC to +40 ºC
MIL/STD	N/A

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com