


**P/N: VNA-35F35M-630**

**3.5mm NMD Female to 3.5mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable | With Armor | DC - 26.5GHz**

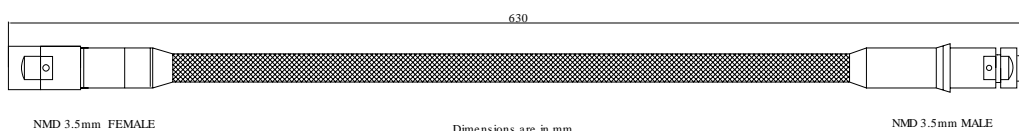

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	3.5mm NMD	3.5mm NMD
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

## Cable Configuration

Cable Impedance (Ohm)	50
-----------------------	----

P/N: VNA-35F35M-630

3.5mm NMD Female to 3.5mm NMD Male Cable Assembly | Precision Flexible VNA Test Cable |  
With Armor | DC - 26.5GHz

## Electrical Data

## Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	0 °C to +40 °C
MIL/STD	N/A