


## WR-112 to SMA Female Waveguide to Coax Adapters with UBR84 Flange, 6.57 - 9.99GHz

WR112/SMA-UBR84-K-V



Dimensions are in mm

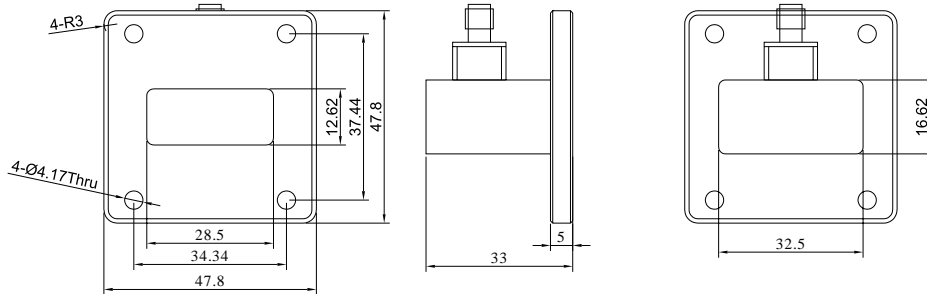

### Product Configuration

|                           |             |
|---------------------------|-------------|
| Body Style                | Right Angle |
| Flange Designation        | UBR84       |
| Waveguide Size            | WR-112      |
| Connector Series          | SMA         |
| Connector Polarity        | Standard    |
| Connector Gender          | Female      |
| Connector Impedance (Ohm) | 50          |

### Electrical Specifications

|                 |              |
|-----------------|--------------|
| VSWR            | 1.25         |
| Frequency Range | 6.57-9.99GHz |

### Mechanical Data

|               |          |
|---------------|----------|
| Weight (g)    | 56.8 g   |
| Body Material | Aluminum |

### Environmental Specifications

|                             |                   |
|-----------------------------|-------------------|
| RoHS Compliant              | Yes               |
| Operating Temperature Range | -55 °C to +165 °C |