


## WR-90 to SMA Female Straight Waveguide to Coax Adapter with UBR100 Flange | 8.2 - 12.4GHz

WR90/SMA-UBR100-K-T

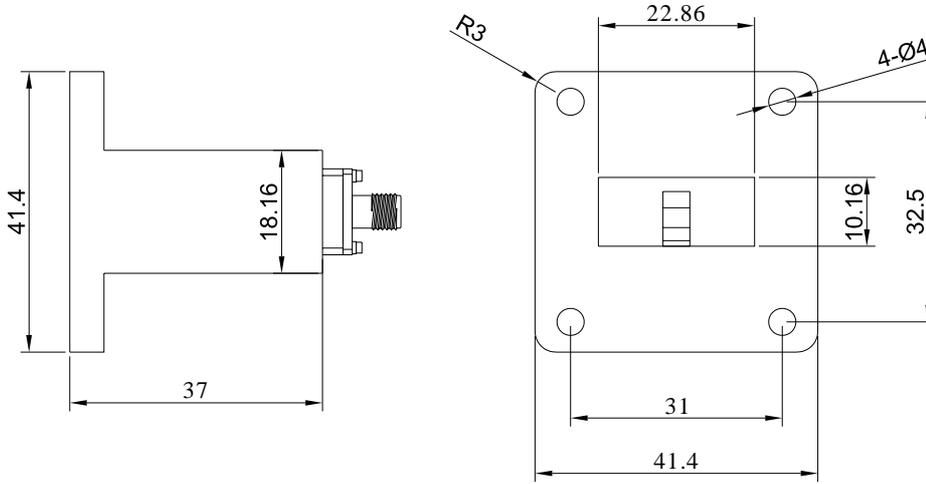

Dimensions are in mm

### Product Configuration

Body Style	Straight
Flange Designation	UBR100
Waveguide Size	WR-90
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

### Electrical Specifications

VSWR / Return Loss	1.2
Insertion Loss	≤ 0.25dB
Frequency Range	8.2-12.4GHz

### Mechanical Data

Weight (g)	55.65 g
Body Material	Aluminum

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +125 °C