1G DIMMER / 250W MULTIPOINT LED / CROSS / WITH LOGO

ACTION: DIMMER SWITCH

KNURL: CROSS

RANGE: DIMMER SWITCHES


A solid metal dimmer switch with our classic diamond-cut knurling. The switch is finished with a solid metal plate and our signature coin screws. Available in five different finishes, they can be used in combination with our matching toggle switches, sockets and USB outlets.









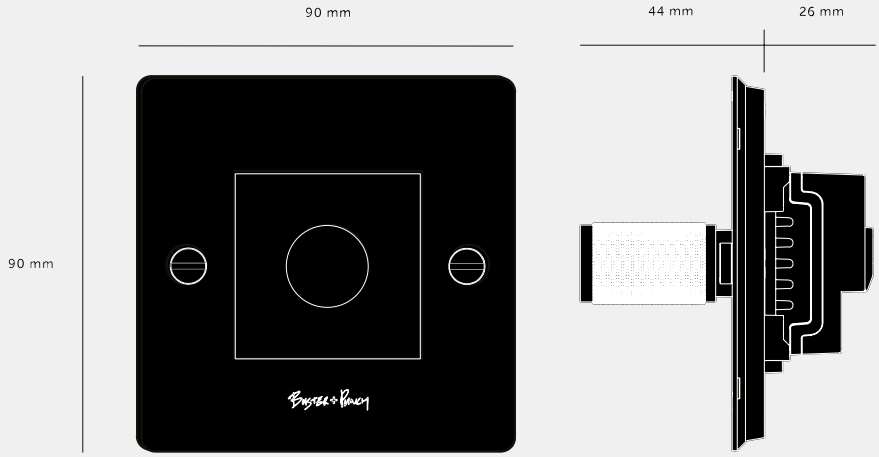

SPECIFICATIONS

Solid metal switch plate with one multipoint dimmer, in our signature white, steel, brass, smoked bronze and black finishes.

Module: CDM-142038
Style: Push On / Off Rotary Dimmer
Switching: Multi-location dimming using retractive switches
Input: 240VAC
Dimming Type: Auto-detect trailing edge and leading edge (with manual override)
Load: 10-350W - Incandescent / 3-250W - LED
Certified for use in UK, Europe and Russia: UKCA / CE / EAC
Certification: EN 60669-2-1

For use with retractive switches on retractive dimming circuits, to control dimming from multiple locations.
Not compatible with standard wiring and standard 1-way, 2-way and 3-way wiring accessories.
Not suitable for motors, fans or any other type of large inductive load.

The dimmer switch incorporates a soft-start feature, which may result in a 1–2 second delay before full illumination to reduce inrush current and extend lamp life.
This module is custom to Buster + Punch and works only with our Cross and Linear knurled dimmer knobs.
note: rotary action includes a soft, audible ticking feedback during adjustment.

Compatible with European standard electricity backboxes. Backbox must be flush mounted.
For indoor use only.
This piece features a 6.5mm shadow gap when installed.

FINISH & SKU NUMBERS

sku:	finish:	size:
CDK-023434	black	1G
CDK-053435	brass	1G
CDK-453437	smoked bronze	1G
CDK-073436	steel	1G
CDK-143438	white	1G
CDK-134871	black / warm sunset	1G

INCLUDED

1 x Wall Plate
1 x Dimmer Module
1 x Dimmer Detail Kit

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.