

1G DIMMER / 250W LED / LINEAR / WITHOUT LOGO

ACTION: DIMMER SWITCH

KNURL: LINEAR

RANGE: DIMMER SWITCHES

A solid metal dimmer switch with our latest linear knurling. The switch is finished with a solid metal plate and torx screws. Available in five different finishes, they can be used in combination with our matching toggle switches, sockets and USB outlets.












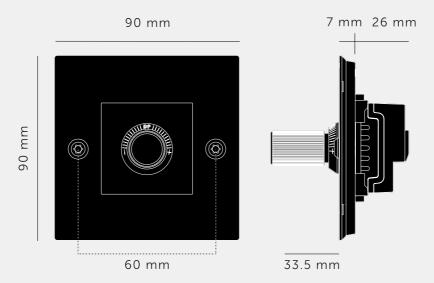

SPECIFICATIONS

Module: CDM-142038

Style: Push ON/OFF rotary dimmer with multi location dimming

via retractive switches. Input: 240VAC ~ 50Hz

Dimming Type: Auto-detect trailing edge & leading edge

Load: 10-350W Incandescent / 3-250W LED

Operating Temperature: 0-55 C / Humidity: 10-90% R.H. Compatibility: For use with retractive switches, and for installation with dedicated retractive-enabled lighting circuits. Not compatible with standard 2-way θ 3-way switch circuits. Certified for use in UK, Europe and Russia: UKCA / CE / EAC

This piece features a 6.5mm shadow gap when installed.

FIN	ISH	ક	SKU	NUM	BERS

sku:	finish:	size:	
CDR-024181	black	1G	
CDR-054182	<pre>brass</pre>	1G	
CDR-454183	smoked bronze	1G	
CDR-074184	steel	1G	
CDR-144185	white	1G	

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

INCLUDED

- 1 x Wall Plate
- 1 x Dimmer Module
- 1 x Detail Kit

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.