

## EU KITCHEN TAP / PULL-OUT MIXER / CROSS

**ACTION: KITCHEN TAP WITH PULL OUT**

**SPRAY**

**KNURL: CROSS**

**RANGE: KITCHEN TAPS**

A kitchen tap with single lever mixer with pull out spray. This tap has been cast, sand- blasted and machined from solid metal in Italy. It features our signature cross-knurl pattern and is refined by hand.

Only available for sale to the following countries: Austria, Czech Republic, Denmark, France, Germany, Greece, Hungary, Iceland, Italy, Netherlands, Norway, Portugal, Romania, Slovak Republic, Serbia, Spain, Sweden and Switzerland.




48mm



261mm

372mm

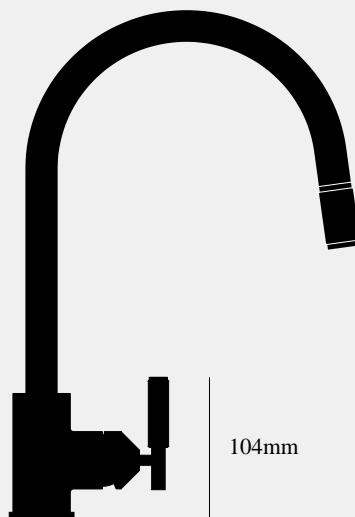

## SPECIFICATIONS

A kitchen mixer tap with pull out spray, with a single lever action that mixes water from the hot and cold pipes in your kitchen.

The mixer tap with pull out spray can be installed on a worktop with a maximum thickness of 70mm. There are no components available for fixing this tap on a worktop with a thickness of greater than 70mm.

Minimum recommended water pressure: 10.2 PSI (0.7 BAR).

Maximum recommended water pressure: 72 PSI (5 BAR).

Recommended maximum hot water temperature: 70 °C (158°F).

Recommended temperature range: 5 – 60 °C (41 – 140°F).

Pull out spray connection hose length: 1.7 m

Pull out spray extraction length: 45 cm (approx from end of mixer)

UK flexible connector hose diameter: 1/2" Ø

EU flexible connector hose diameter: 3/8" Ø

360 degree swivel spout.

Note: exceeding these temperatures or water pressures can result in damage to the tap. A pressure reducing valve may be required to be fitted in high water pressure situations.

## INCLUDED

1 x Kitchen Mixer Tap with Pull Out Spray

2 x Flexible connector hoses

1 x Tap Base and set of washers

1 x Threaded bar and nut

1 x Supporting tap brace (for surfaces with thickness <5mm)  
[ info. INSTALLATION TOOLS REQUIRED. ]

1 x Adjustable spanner

## PLEASE NOTE

All Buster + Punch mixer taps conform to standard EN817. In some cases, local housing regulations may require mixer taps to be of a higher minimum water pressure standard. In this instance we would recommend consulting with a certified plumber about installing a pressure regulator or similar device. Mixer taps are tested to work with a max. pressure of 10 bar (1000 kPa) and recommended working pressure range is 1.0 – 5.0 bar (100 kPa – 500 kPa).

## FINISH & SKU NUMBERS

| sku:      | finish:         | size: |
|-----------|-----------------|-------|
| C0-052622 | ● brass         |       |
| C0-072621 | ● steel         |       |
| C0-592623 | ● welders black |       |

## CARE INSTRUCTIONS

Wipe with lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.