

# EU KITCHEN TAP / PULL-OUT MIXER / CROSS

ACTION: KITCHEN TAP WITH PULL OUT

SPRAY

KNURL: CROSS

RANGE: KITCHEN TAPS

A kitchen tap with single lever mixer with pull out spray. This tap has been cast, sand- blasted and machined from solid metal in Italy. It features our signature cross-knurl pattern and is refined by hand.

Only available for sale to the following countries: Austria, Czech Republic, Denmark, France, Germany, Greece, Hungary, Iceland, Italy, Netherlands, Norway, Portugal, Romania, Slovak Republic, Serbia, Spain, Sweden and Switzerland.












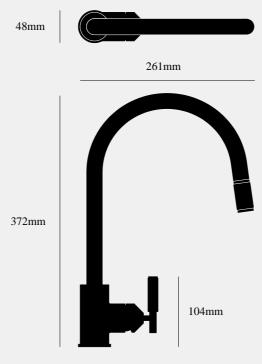

### SPECIFICATIONS

A kitchen mixer tap with pull out spray, with a single lever action that mixes water from the hot and cold pipes in your kitchen.

The mixer tap with pull out spray can be installed on a worktop with

a maximum thickness of 70mm. There are no components available

for fixing this tap on a worktop with

a thickness of greater than 70mm.

Minimum recommended water pressure: 10.2 PSI (0.7 BAR). Maximum recommended water pressure: 72 PSI (5 BAR). Recommended maximum hot water temperature: 70 °C (158°F). Recommended temperature range: 5 - 60 °C (41 - 140°F).

Pull out spray connection hose length: 1.7 m

Pull out spray extraction length: 45 cm (approx from end of mixer)

UK flexible connector hose diameter: 1/2"  $\varnothing$  EU flexible connector hose diameter: 3/8"  $\varnothing$ 

Note: exceeding these temperatures or water pressures can result in  $% \left( 1\right) =\left( 1\right) \left( 1\right)$ 

damage to the tap. A pressure reducing valve may be required to be

fitted in high water pressure situations.

### EINISH & SKII NIIMBEDS

THISH O SKO NOMBERS		
sku:	finish:	size:
C0-052622	brass	
C0-354235	gun metal	
C0-074242	steel	
CKT-484028	<ul><li>welders black</li></ul>	

# CARE INSTRUCTIONS

Wipe with lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

## INCLUDED

- 1 x Kitchen Mixer Tap with Pull Out Spray
- 2 x Flexible connector hoses
- 1 x Tap Base and set of washers
- 1 x Threaded bar and nut
- 1 x Supporting tap brace (for surfaces with thickness  $<5 \,\mathrm{mm}$ )

[ info. INSTALLATION TOOLS REQUIRED. ]

1 x Adjustable spanner

## PLEASE NOTE

All Buster + Punch mixer taps conform to standard EN817. In some cases, local housing regulations may require mixer taps to be of a higher minimum water pressure standard. In this instance we would recommend consulting with a certified plumber about installing a pressure regulator or similar device. Mixer taps are tested to work with a max. pressure of 10 bar (1000 kPa) and recommended working pressure range is 1.0 – 5.0 bar (1000 kPa – 500 kPa).