

UK KITCHEN TAP / MIXER / CROSS


ACTION: KITCHEN TAP

KNURL: CROSS

RANGE: KITCHEN TAPS

A kitchen tap with single lever mixer. This tap has been cast, sand-blasted and machined from solid metal in Italy. It features our signature cross-knurl pattern and is refined by hand.



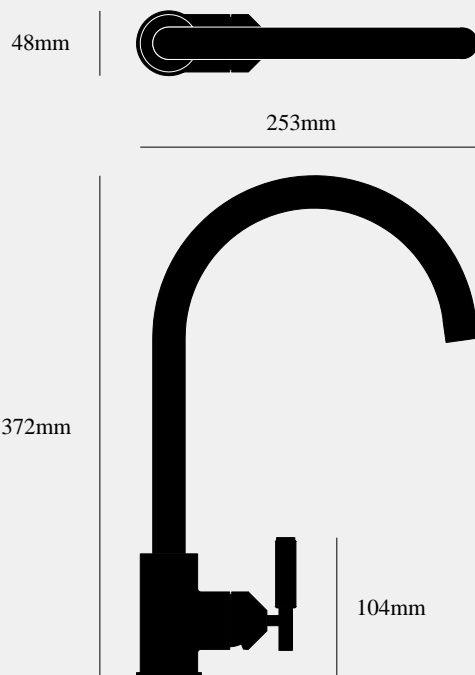

SPECIFICATIONS

A kitchen mixer tap with a single lever action that mixes water from the hot and cold pipes in your kitchen.

The mixer tap can be installed on a worktop with a maximum thickness of 45mm – a longer securing bolt can be supplied by Buster + Punch for installation on a thicker worktop, up to 180mm.

Minimum recommended water pressure: 10.2 PSI (0.7 BAR).

Maximum recommended water pressure: 72 PSI (5 BAR).

Recommended maximum hot water temperature: 70 °C (158°F).

Recommended temperature range: 5 – 60 °C (41 – 140 °F).

UK flexible connector hose diameter: 1/2" ø

EU flexible connector hose diameter: 3/8" ø

360 degree swivel spout

Note: exceeding these temperatures or water pressures can result in damage to the tap. A pressure reducing valve may be required to be fitted in high water pressure situations.

FINISH & SKU NUMBERS

sku:	finish:	size:
RKT-051569	● brass	
RKT-351571	● gun metal	
RKT-071568	● steel	
RKT-481570	● welders black	

CARE INSTRUCTIONS

Wipe with lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.

INCLUDED

1 x Kitchen Mixer Tap
2 x Flexible connector hoses
1 x Tap Base and set of washers
1 x Threaded bar and nut
1 x Supporting tap brace (for surfaces with thickness <5mm)
[info. INSTALLATION TOOLS REQUIRED.]
1 x Adjustable spanner

PLEASE NOTE

All Buster + Punch mixer taps conform to standard EN817. In some cases, local housing regulations may require mixer taps to be of a higher minimum water pressure standard. In this instance we would recommend consulting with a certified plumber about installing a pressure regulator or similar device. Mixer taps are tested to work with a max. pressure of 10 bar (1000 kPa) and recommended working pressure range is 1.0 – 5.0 bar (100 kPa – 500 kPa).