

UK KITCHEN TAP / PULL-OUT MIXER / LINEAR


**ACTION: KITCHEN TAP WITH PULL OUT
SPRAY**

KNURL: LINEAR

RANGE: KITCHEN TAPS

A kitchen tap with single lever mixer with pull out spray. This tap has been cast, sand- blasted and machined from solid metal in Italy. It features our signature linear-knurl pattern and is refined by hand.



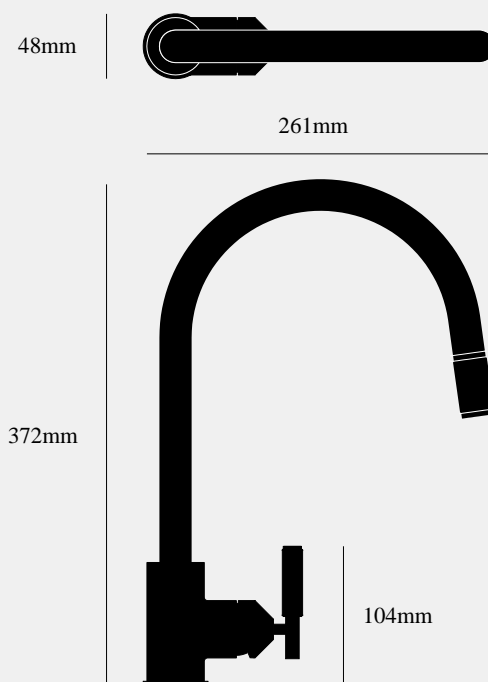

SPECIFICATIONS

A kitchen mixer tap with pull out spray, with a single lever action that mixes water from the hot and cold pipes in your kitchen.

The mixer tap with pull out spray can be installed on a worktop with

a maximum thickness of 70mm. There are no components available

for fixing this tap on a worktop with

a thickness of greater than 70mm.

Minimum recommended water pressure: 10.2 PSI (0.7 BAR).

Maximum recommended water pressure: 72 PSI (5 BAR).

Recommended maximum hot water temperature: 70 °C (158°F).

Recommended temperature range: 5 – 60 °C (41 – 140°F).

Pull out spray connection hose length: 1.7 m

Pull out spray extraction length: 45 cm (approx from end of mixer)

UK flexible connector hose diameter: 1/2" ø

EU flexible connector hose diameter: 3/8" ø

360 degree swivel spout.

Note: exceeding these temperatures or water pressures can result in

damage to the tap. A pressure reducing valve may be required to be

fitted in high water pressure situations.

FINISH & SKU NUMBERS

sku:	finish:	size:
RKT-071664	● steel	

INCLUDED

1 x Kitchen Mixer Tap with Pull Out Spray

2 x Flexible connector hoses

1 x Tap Base and set of washers

1 x Threaded bar and nut

1 x Supporting tap brace (for surfaces with thickness <5mm)

[info. INSTALLATION TOOLS REQUIRED.]

1 x Adjustable spanner

PLEASE NOTE

All Buster + Punch mixer taps conform to standard EN817. In some cases, local housing regulations may require mixer taps to be of a higher minimum water pressure standard. In this instance we would recommend consulting with a certified plumber about installing a pressure regulator or similar device. Mixer taps are tested to work with a max. pressure of 10 bar (1000 kPa) and recommended working pressure range is 1.0 – 5.0 bar (100 kPa – 500 kPa).

CARE INSTRUCTIONS

Wipe with lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.