


Anti-Slip Tape

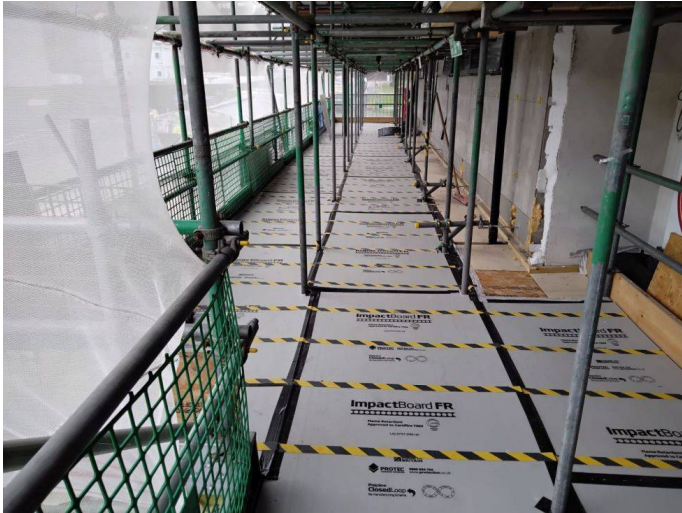

Product Specification

Application Temperature	15c - 30c
Grit	60 Grit
Material	Grip tape with solvent rubber adhesive

Range

Code	Size
ANTISLIPTAPE	25mm x 18.2m
HAZARDTAPEBY	50mm x 18.3m

Installation Instructions/Guidelines

- Before applying tape to a finished surface, a trial should be undertaken to test suitability
- Please contact our technical department for specific advice

Handling & Storage

- Store in ambient conditions. Please note the performance of tape varies in extreme temperatures, subzero temperatures may cause lack of adhesion and high temperatures may cause adhesive residue to be left on the surface once the tape is removed.

Features & Benefits

- Suitable for internal and external use
- Easy to install
- Increases traction to avoid accidents
- Add to stair protection products to increase grip

Product Disclaimer

The information provided in all product, safety and technical data sheets is to the best of our knowledge correct but not all-inclusive and without warranty and is to be used solely as a guide. Similarly, all technical advice, whether verbal, in writing, or as a result of sample trials, is for guidance and is given in good faith but without warranty, since site conditions, care and skill of application are beyond our control. Protec International Ltd can accept no liability for the performance of our products, or any damage resulting from handling or contact beyond the value of the material supplied. This does not affect your statutory rights.

Every effort to ensure the accuracy of the images of our products has been made, however the accuracy of the colours may differ and vary according to your computer monitor.

Please contact our Customer Services Department on 0800 834 704 for further information.

DOC REF: Anti-Slip Tape 24 June 2026



0800 834 704 | 01625 855600
enquiries@protection.co.uk
www.protection.co.uk

