


Hanger Pins

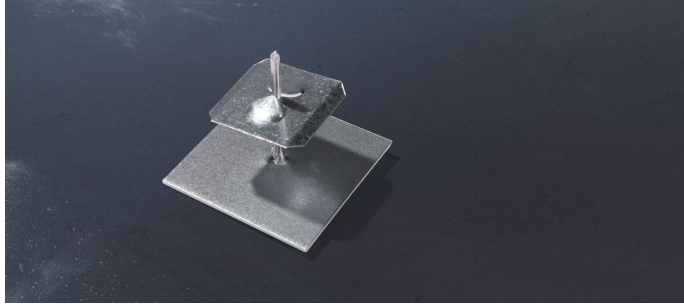

Product Specification

Adhesive	White, cross linked, closed-cell polyethylene foam with modified acrylate adhesive on both sides. Lined with siliconized paper
Colour	Silver
Material	Aluminium pin, galvanized steel base & washer
Weight	6.2kg per pack

Range

Code	Size
HANGERPIN	Base 50mm x 50mm, Pin 40mm, washer 32mm x 30mm

Adhesive fixing pins designed to secure protection materials for vertical applications. These Hanger Pins will reliably hold protective materials such as Proplex on glazing and curtain walling.

Experience the benefits of simple and quick installation steps, allowing you to securely hold vertically installed protection materials in place.

Hanger pins have an extremely strong adhesive on the backing, create a fixing tab beneath the adhesive pin backing to avoid adhesive transfer on the the surface or glazing. This can be done by installing a tab of High Performance Low Tack Tape beneath the pin backing.

Features & Benefits

- Adhesive fixing pins designed for vertical applications.
- Secures protection materials like Proplex on glazing and curtain walling.
- High tack adhesive creates a strong hold.
- Installation using a fixing tab created with Glass tape or High Performance Low Tack Tape to avoid adhesive transfer.
- Simple and quick installation process.

Installation Instructions/Guidelines

- Very strong adhesive on the backing pad, do not install directly on to the surface you are protecting.
- Use a suitable tape to fix onto the surface to create a fixing tab for the hanger pin. Please contact our technical team to discuss the best tape for the surface you are protecting
- Remove the backing paper and secure the adhesive base onto the tape
- Make sure you have enough pins in place to hold the weight of the protection you are securing
- Pierce the pins through the Proplex sheeting
- Push the washer on the pin to secure the Proplex
- Bend the exposed pin length over tight to the protection so it is not left protruding

Handling & Storage

- Store in ambient conditions. Please note the performance of adhesive products varies in extreme temperatures, subzero temperatures may cause lack of adhesion and high temperatures may cause adhesive residue to be left on the surface once the base is removed.

Product Disclaimer

The information provided in all product, safety and technical data sheets is to the best of our knowledge correct but not all-inclusive and without warranty and is to be used solely as a guide. Similarly, all technical advice, whether verbal, in writing, or as a result of sample trials, is for guidance and is given in good faith but without warranty, since site conditions, care and skill of application are beyond our control. Protec International Ltd can accept no liability for the performance of our products, or any damage resulting from handling or contact beyond the value of the material supplied. This does not affect your statutory rights.

Every effort to ensure the accuracy of the images of our products has been made, however the accuracy of the colours may differ and vary according to your computer monitor.

Please contact our Customer Services Department on 0800 834 704 for further information.

DOC REF: [Hanger Pins 06 March 2025](#)



0800 834 704 | 01625 855600
enquiries@protection.co.uk
www.protection.co.uk

