


# Multi-Use Film

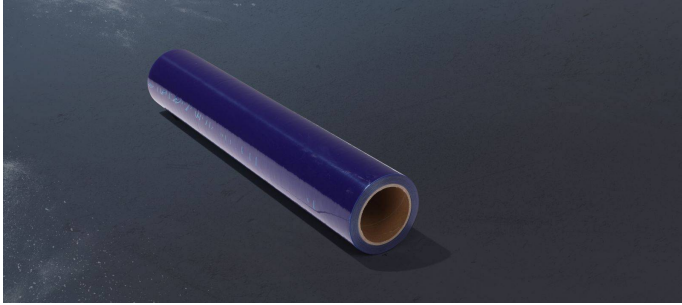

## Product Specification

Colour	Blue
Material	Low tack adhesive polythene film
Tensile Strength	Length - 27n/mm <sup>2</sup> , Transverse - 17n/mm <sup>2</sup>
Weight (g/m <sup>2</sup> )	40 micron

## Range

Code	Size
MULTIUSE600X100M	600mm x 100m

**OUR MULTI-USE PLASTIC WRAP EASILY CLINGS AROUND DIFFICULT, UNEVEN SURFACES.**

### Features & Benefits

- 600mm x 100m Roll
- Ideal for covering and protecting finished surfaces of all shapes and sizes
- Protects fixtures and fittings from scuffs, scratches, and stains
- Waterproof surface can handle spillages of all magnitude
- Lightweight and manageable rolls for quick and easy handling and installation

### Applications

Offering optimum versatility, our low tack plastic film is perfect for multiple site applications and can protect most finished surfaces from signs of damage.

### Installation Instructions/Guidelines

- Recommended application temperature +15oc to +40oc
- Installation guide depends on application. Please contact our technical department for specific advice
- We advise that any self-adhesive plastic is left down for a maximum of 4 weeks before being replaced if needed. You should always test the product on a small area of the floor surface before applying

### Handling & Storage

- Store in ambient conditions. Please note the performance of adhesive products varies in extreme temperatures, subzero temperatures may cause lack of adhesion and high temperatures may cause adhesive residue to be left on the surface once the tape is removed.

## Product Disclaimer

The information provided in all product, safety and technical data sheets is to the best of our knowledge correct but not all-inclusive and without warranty and is to be used solely as a guide. Similarly, all technical advice, whether verbal, in writing, or as a result of sample trials, is for guidance and is given in good faith but without warranty, since site conditions, care and skill of application are beyond our control. Protec International Ltd can accept no liability for the performance of our products, or any damage resulting from handling or contact beyond the value of the material supplied. This does not affect your statutory rights.

Every effort to ensure the accuracy of the images of our products has been made, however the accuracy of the colours may differ and vary according to your computer monitor.

Please contact our Customer Services Department on 0800 834 704 for further information.

DOC REF: Multi-Use Film 29 June 2026



0800 834 704 | 01625 855600  
enquiries@protection.co.uk  
www.protection.co.uk

