


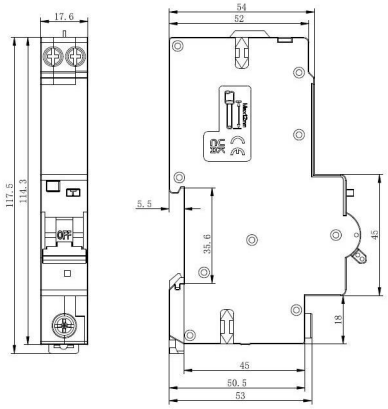

AFDD RCBO B6A 6kA 30mA Type A

- Residual current circuit breaker with integral overcurrent protection
- 6kA short circuit breaking capacity
- double pole switching for complete isolation in the event of a fault
- switch neutral pole significantly reduces the instalation and commissioning test time
- Uni-directional polarity
- Suitable for use in TN & TT network systems

P04-B06/30/1PNA

TECHNICAL DATA

Rated Operating Voltage (Ue)	230-240V~
Rated Operational Current (Ie)	6A
Rated Residual Operating Current (I⊠N)	30mA Type A
Rated Frequency (Fn)	50/60Hz
ICC Rating (kA)	6
Trip Curve	B
Phase	1
Energy Limiting Class	3
Rated Impulse Withstand Voltage (Uimp)	4kV
Earthing System(s)	TN/TT
Poles	1P+swN
Method of Mounting	DIN Rail Mounting

REGISTRY

Barcode	5026992046142
Min Order Quantity	1
Gross Weight (kg)	0.192
Product Qty.	1
Quantity Interval	1
Reference Standard(s)	IEC 61009-1, BS EN 61009-1, IEC 62606, BS EN 62606
UK Reference Standards	IEC/BS EN61009-1, IEC/BS EN62606
UK Regulations (UKCA)	ROHS Regulations 2012, Waste Electrical & Electronic Equipment Regulations 2013 The Electrical Equipment (Safety) Regulations 2016
EU Reference Standards	IEC/EN61009-1 , IEC/EN62606

Lewden Ltd., Unit 4, Bradbury, Drive, Springwood Industrial Estate, Braintree, Essex, CM7

Tel +44 (0)1376 336200, www.lewden.com, Sales@lewden.co.uk