


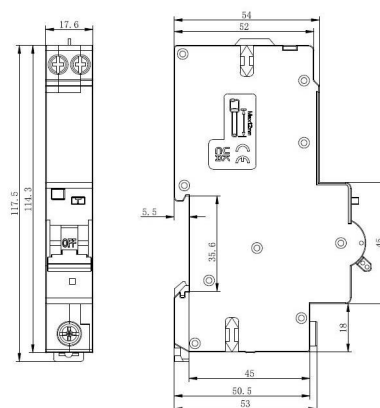

AFDD RCBO B6A 6kA 30mA Type A

- Residual current circuit breaker with integral overcurrent protection
- 6kA short circuit breaking capacity
- double pole switching for complete isolation in the event of a fault
- switch neutral pole significantly reduces the installation and commissioning
- Uni-directional polarity
- Suitable for use in TN & TT network systems

P04-B06/30/1PNA

TECHNICAL DATA

Rated Operating Voltage (Ue)	230-240V~
Rated Operational Current (Ie)	6A
Rated Residual Operating Current (I _{ΔN})	30mA Type A
Rated Frequency (Fn)	50/60Hz
ICC Rating (kA)	6
Trip Curve	B
Phase	1
Energy Limiting Class	3
Rated Impulse Withstand Voltage (Uimp)	4kV
Earthing System(s)	TN/TT
Poles	1P+swN
Method of Mounting	DIN Rail Mounting

REGISTRY

Barcode	5026992046142
Pkg. level 1 - Product Qty.	1
Pkg. level 1 - Volume (dm ³)	0.319
Pkg. level 1 - Carton Weight (kg)	0.018
Pkg. level 2 - Product Qty.	40
Pkg. level 2 - Dimensions (HWD)	280x310x180 mm (HWD)
Pkg. level 2 - Volume (dm ³)	16
Pkg. level 2 - Gross Weight (kg)	7.9
Pkg. level 2 - Carton Weight (kg)	0.400
Pkg. level 2 - Packaging Material	Cardboard
Min Order Quantity	80