


RAMSEY MARINE GRADE FLOOD LIGHT 6000K 240W

NET-23-04-17



Features & Benefits

- Marine Grade coating protects the fitting from harsh weather and sea salt - ideal for coastal applications
- Breather valve allows heat to escape and prevents condensation
- IP65 and IK08 protection
- Tempered glass provides double protection and good self-clean
- Complete with Tamper-Proof Fixings
- Excellent cooling performance that ensures a long lifespan

Key Data

Power	240W
Luminous Flux	34528lm
Colour Temperature	6000K
IP Rating	IP65
IK Rating	IK08
Dimensions	515 x 393 x 78mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-42-04-39	2-in-1 Motion and Photocell Sensor for Ramsey Marine Grade Flood Lights
NET-23-16-61	Single Column Bracket
NET-23-16-63	Twin Column Bracket
NET-23-16-65	Single Pivot Bracket
NET-23-16-67	Twin Pivot Bracket

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	100-270V
Power Factor	>0.90
Luminaire Efficacy	144lm/w
LED Manufacturer	Sanan
LED Type	EMC 3030
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	42V
Total Circuit Power (w)	240W +/- 5W
Electrical Class	1
Colour Rendering	>70 CRI
Lamp Viewing Angle	90°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	27
Weight	9.2Kg
Manufacturer	FYTLED
Power Frequency	47-63Hz
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	Glass

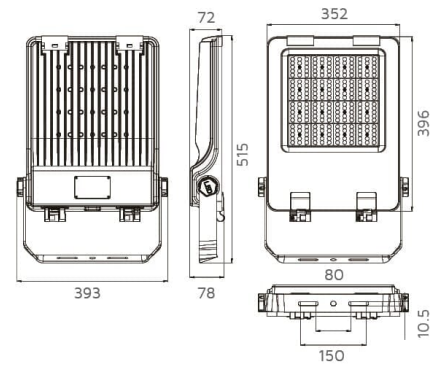

Other Options

Description	
NET-23-04-13	Ramsey Marine Grade Flood Light 6000K 150W
NET-23-04-15	Ramsey Marine Grade Flood Light 6000K 200W
NET-23-04-17	Ramsey Marine Grade Flood Light 6000K 240W
NET-23-04-22	Ramsey Marine Grade Flood Light 6000K 200W Emergency
NET-23-04-21	Ramsey Marine Grade Flood Light 6000K 150W Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

TEMPERED GLASS

Provides double protection and self clean

IK08 AND IP65 RATED HOUSING

Protect your flood light from water, dust and impact

BREATHER VALVE

Prevents condensation from building up inside the fitting

6000K COLOUR TEMPERATURE

Bright and crisp light best used for industrial spaces

MARINE GRADE COATING

Protect your flood light from harsh weather and sea salt - perfect for coastal applications

TOOL-FREE BOLTS

Set the angle of the flood light without the need for tools

UP TO 3,000 LUMENS IN EMERGENCY MODE

Its high output Emergency operation ensures the fitting comes on in the event of a power failure

Emergency options only