


RAMSEY MARINE GRADE FLOOD LIGHT 6000K 200W EMERGENCY

NET-23-04-22

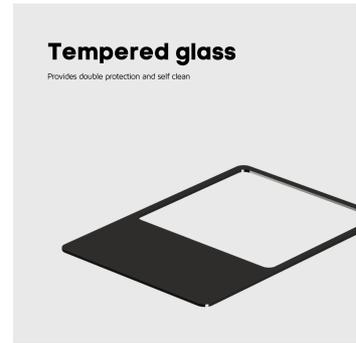

Features & Benefits

- 3H Emergency function
- Marine Grade coating protects the fitting from harsh weather and sea salt - ideal for coastal applications
- Breather valve allows heat to escape and prevents condensation
- IP65 and IK08 protection
- Tempered glass provides double protection and good self-clean
- Complete with Tamper-Proof Fixings

Key Data

| | |
|---------------------------|---------------------------------|
| Power | 200W |
| Luminous Flux | 29170lm |
| Colour Temperature | 6000K |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Dimensions | 515 x 393 x 78mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|---|
| NET-42-04-39 | 2-in-1 Motion and Photocell Sensor for Ramsey Marine Grade Flood Lights |
| NET-23-16-61 | Single Column Bracket |
| NET-23-16-63 | Twin Column Bracket |
| NET-23-16-65 | Single Pivot Bracket |
| NET-23-16-67 | Twin Pivot Bracket |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
 Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
 FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|-----------------|
| Input Voltage (AC) | 100-270V |
| Power Factor | >0.90 |
| Luminaire Efficacy | 145lm/W |
| LED Manufacturer | Sanan |
| LED Type | EMC 3030 |
| No. of LEDs | 280 |
| Driver Manufacturer | Tomcarline |
| Driver Output Voltage (DC) | 42V |
| Total Circuit Power (W) | 200W +/- 5W |
| Electrical Class | 1 |
| Colour Rendering | >70 CRI |
| Lamp Viewing Angle | 90° |
| Dimmable | No |
| Operating Temp. | 0°C to +45°C |
| Lifespan LM80 | 50,000 Hours |
| UGR Rating | 27 |
| Weight | 9.1Kg |
| Manufacturer | FYTLED |
| Hours Maintained | 3H |
| Luminous Flux Factor | 10% |
| Power Frequency | 47-63Hz |
| Self Test | No |
| Housing Colour | Black |
| Housing Material | Aluminium |
| Battery Pack | LiFePO4 |
| Diffuser Material | Glass |
| Emergency Kit | 3 Year Warranty |
| Emergency Operation | >3H |
| Emergency Pack | Streamer |

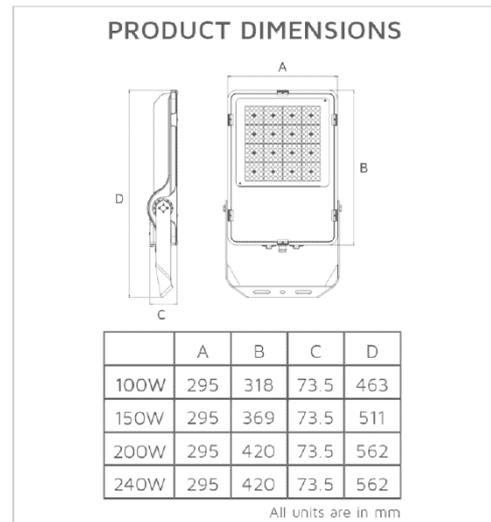

Other Options

| | | Description |
|--------------|---------------------------|--|
| NET-23-04-13 | Inrush Current (Duration) | 510ms |
| NET-23-04-13 | | Ramsey Marine Grade Flood Light 6000K 150W |
| NET-23-04-15 | | Ramsey Marine Grade Flood Light 6000K 200W |
| NET-23-04-17 | | Ramsey Marine Grade Flood Light 6000K 240W |
| NET-23-04-22 | | Ramsey Marine Grade Flood Light 6000K 200W Emergency |
| NET-23-04-21 | | Ramsey Marine Grade Flood Light 6000K 150W Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

TEMPERED GLASS

Provides double protection and self clean

IK08 AND IP65 RATED HOUSING

Protect your flood light from water, dust and impact

BREATHER VALVE

Prevents condensation from building up inside the fitting

6K

6000K COLOUR TEMPERATURE

Bright and crisp light best used for industrial spaces

MARINE GRADE COATING

Protect your flood light from harsh weather and sea salt - perfect for coastal applications

TOOL-FREE BOLTS

Set the angle of the flood light without the need for tools

UP TO 3,000 LUMENS IN EMERGENCY MODE

Its high output Emergency operation ensures the fitting comes on in the event of a power failure

Emergency options only

