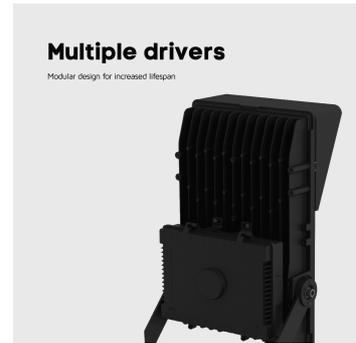
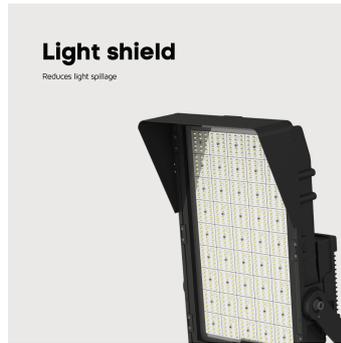


**BENWICK OPEN AREA FLOOD LIGHT 6000K 500W**

NET-23-04-65


**Features & Benefits**

- IP66 and IK10 rated housing
- Low maintenance back plate with a protective mesh
- Adjustable bracket for easy installation
- Multiple drivers for greater reliability
- 10KV surge protection
- Light shield to reduce spillage

**Key Data**

<b>Power</b>	500W
<b>Luminous Flux</b>	70400lm
<b>Colour Temperature</b>	6000K
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK10
<b>Dimensions</b>	691 x 378 x 261mm
<b>Warranty</b>	5 Years (Registration Required)

**Compatible Accessories**

NET-23-04-67	Wire Guard for Benwick Open Area Flood Lights
NET-23-16-61	Single Column Bracket
NET-23-16-63	Twin Column Bracket

**NET LED Lighting**


 Buckingham Business Park, 300 Anderson Road,  
 Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk


**ORDER BY 6PM**  
 FOR NEXT DAY DELIVERY

## Technical Specifications

Input Voltage (AC)	100-250V
Power Factor	>0.9
Luminaire Efficacy	140lm/W
LED Manufacturer	Lumileds
LED Type	EMC 3030
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	42V
Total Circuit Power (W)	500W
Electrical Class	1
Colour Rendering	>70 CRI
Lamp Viewing Angle	30° x 70°
Dimmable	No
Operating Temp.	-15°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	More than 25
Weight	18.5Kg
Manufacturer	FYTLED
Fire Rating	V1
Housing Colour	Black
Housing Material	Aluminium
Diffuser Material	PMMA

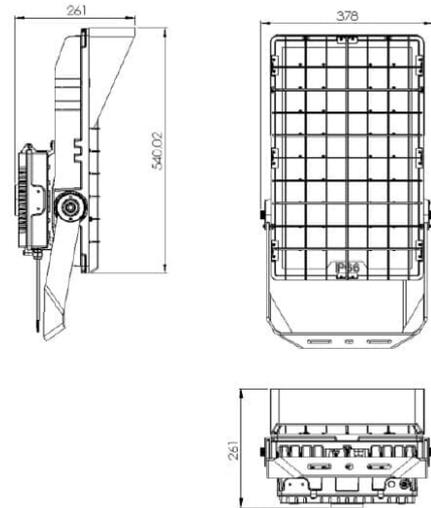

## Other Options

Description	
NET-23-04-65	Benwick Open Area Flood Light 6000K 500W

### NET LED Lighting

Buckingham Business Park, 300 Anderson Road,  
Swavesey, Cambridge, CB24 4UQ



**ORDER BY 6PM**  
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

**140**  
lm/W

**6K**

### 6000K COLOUR TEMPERATURE


Bright and crisp light best used for industrial and sports applications

### IP66 AND IK10 RATED HOUSING

Protected from impact and harsh weather conditions

### MULTIPLE DRIVERS WITH 10KV SURGE PROTECTION

Greater reliability and provides robust protection against voltage spikes

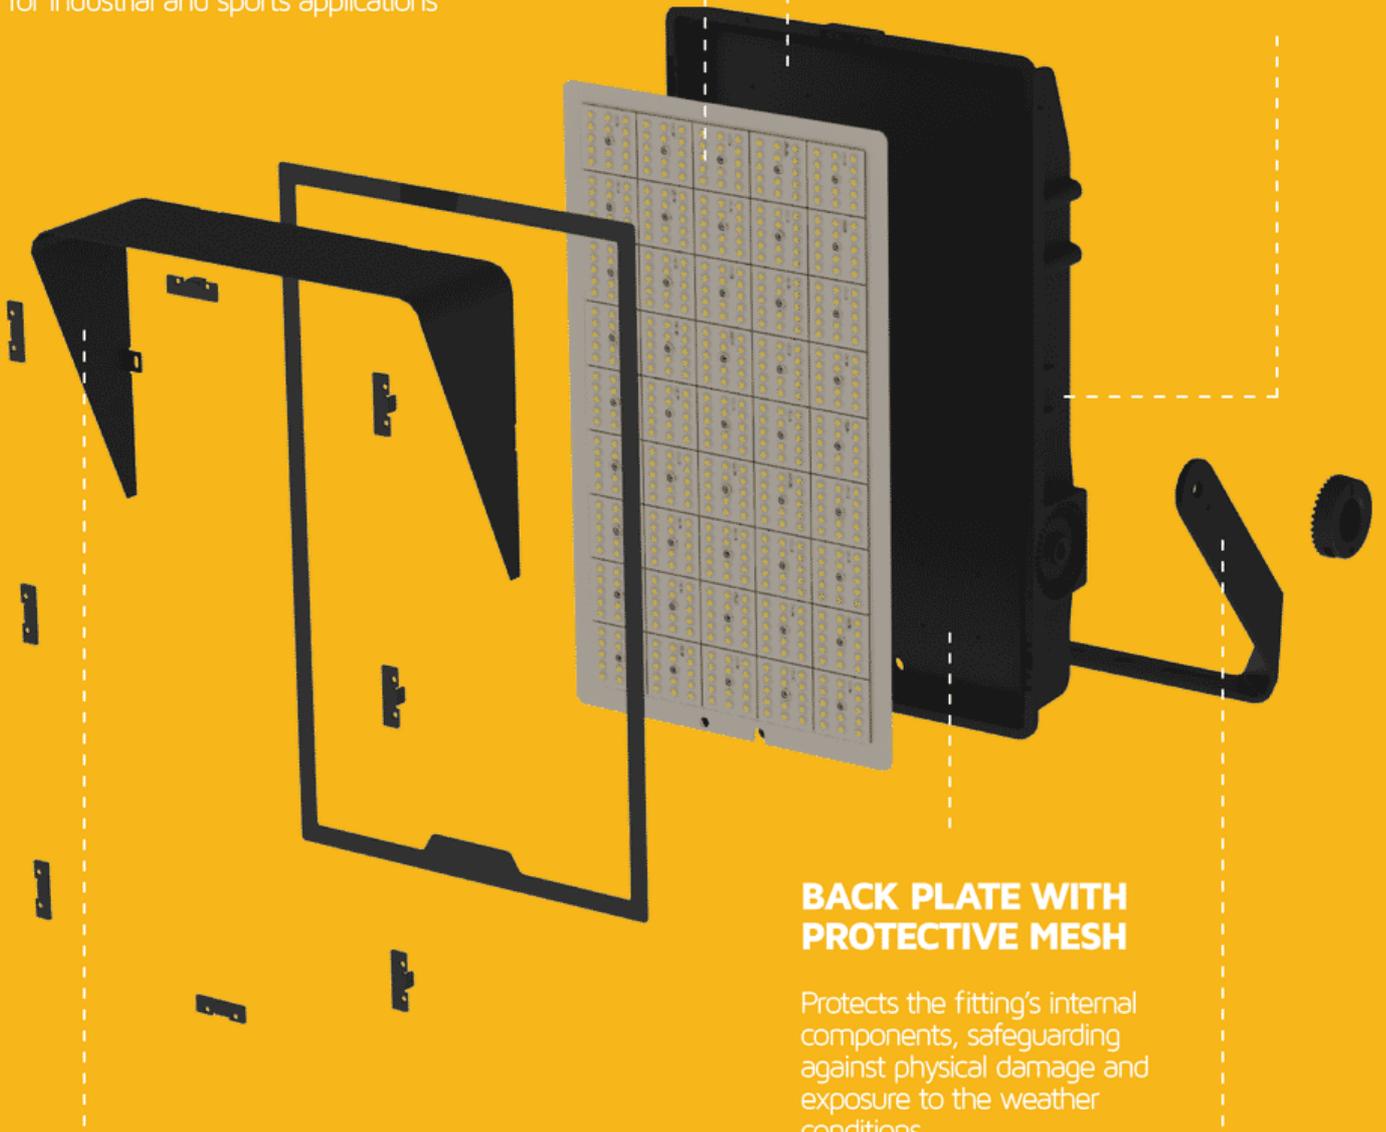

### LIGHT SHIELD

Reduces light spillage into unintended areas - crucial in urban environments or areas near wildlife

### BACK PLATE WITH PROTECTIVE MESH

Protects the fitting's internal components, safeguarding against physical damage and exposure to the weather conditions

### ADJUSTABLE BRACKET

Allows for easier mounting and provides flexibility when positioning the fitting