

COTON CLEAN AREA HIGH BAY 5000K 150W STANDARD


NET-23-12-30



STD

IP65 and IK10 rated housing

Protects the fitting from high pressure water and impact



Non-toxic aluminium exterior

Prevents yellowing with the food safe powder coated housing



Features & Benefits

- Extremely energy efficient - up to 140lm/W
- Unique internal thermal management structure
- Suitable for high humidity applications
- PC lens to comply with food safety regulations
- IP65 and IK10 rated housing
- Non-toxic powder coated aluminium exterior

Key Data

Power	150W
Luminous Flux	21000lm
Colour Temperature	5000K
IP Rating	IP65
IK Rating	IK10
Dimensions	Ø460 x 177mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-23-12-32	PIR Sensor for Coton High Bays
NET-23-12-34	Remote Control for Coton High Bays

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	100-277V
Power Factor	>0.9
Luminaire Efficacy	140lm/W
LED Manufacturer	Sanan
LED Type	SMD 3030
No. of LEDs	280
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	42V
Total Circuit Power (W)	150W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	110°
Dimmable	Via Sensor
Operating Temp.	-25°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 30
Weight	6.7Kg
Manufacturer	FYTLED
Fire Rating	V0
Housing Colour	White
Housing Material	Aluminium
Diffuser Material	PC

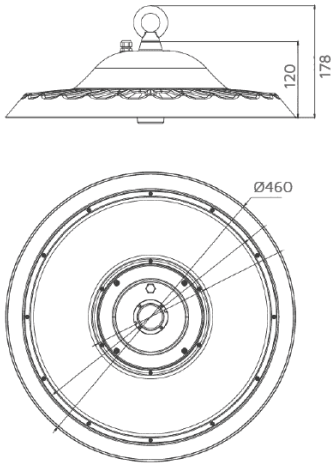

All units are in mm

Other Options

Description	
NET-23-12-30	Coton Clean Area High Bay 5000K 150W Standard

NET LED Lighting
Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY

**IP65 AND IK10
RATED HOUSING**

Protect your fitting from
high pressure water and impact

**POLYCARBONATE
LENS**

Comply with food safety
regulations with this
glass-free fitting

**NON-TOXIC
ALUMINIUM EXTERIOR**

Prevent yellowing with the
food safe powder coated housing

**5000K COLOUR
TEMPERATURE**

Bright and crisp light best used
for industrial spaces

**0-50% STANDBY MODE
AND 8M DETECTION
DISTANCE**

Reduce unnecessary energy
consumption by avoiding lighting
in areas that don't need it

PIR Sensor only