


ORWELL HIGH BAY 5000K 100W MICROWAVE SENSOR EMERGENCY

NET-23-12-53



Features & Benefits

- High Power 20W Emergency function
- Microwave Dimming Sensor - 15m detection range, 5-150lux
- 0%, 10% or 25% Standby Mode
- Highly efficient heat sink
- Suspension ring for easy installation
- 1m flex

Key Data

Power	100W
Luminous Flux	17600lm
Colour Temperature	5000K
IP Rating	IP65
IK Rating	IK10
Dimensions	Ø305 x 280mm
Warranty	5 Years (Registration Required)

Compatible Accessories

NET-46-16-06	Universal LED High Bay Suspension Kit
NET-42-43-22	Merrytek Remote Control for Sensors
NET-23-16-07	Orwell High Bay Mounting Bracket

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	200-240V
Power Factor	>0.95
Luminaire Efficacy	176lm/W
LED Manufacturer	MTC
LED Type	SMD 2835
No. of LEDs	288
Driver Manufacturer	Tomcarline
Driver Output Voltage (DC)	142V
Total Circuit Power (W)	100W +/- 10W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	No
Operating Temp.	0°C to +45°C
Lifespan LM80	50,000 Hours
UGR Rating	Less than 30
Weight	6.3Kg
Manufacturer	FYTLED
Fire Rating	V2
Luminous Flux Factor	20%
Lux Levels	5-150lux
Max. Detection Distance	15m
Self Test	No
Housing Colour	Black
Housing Material	Aluminium
Battery Pack	Streamer
Detection Angle	360°
Diffuser Material	Polycarbonate
Dimming Range	50%, 75% or 100%

Other Options

Description		
Emergency Kit	3 Year Warranty	Orwell High Bay 5000K 100W Emergency
Emergency Operation	>3H	Orwell High Bay 5000K 100W Microwave Sensor Emergency
Emergency Pack	Streamer	
Sensor IP Rating	IP65	
Standby Dimming Level	0% / 10% / 25%	

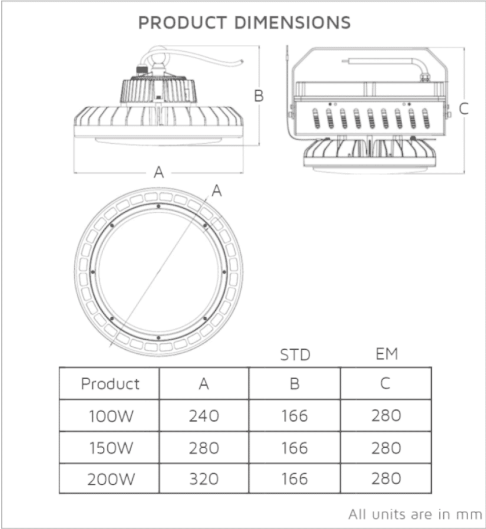

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

175
lm/W

**20W HIGH OUTPUT
EMERGENCY OPERATION**

Ensures the fitting comes on in the event of a power failure

Emergency options only

**CENTRAL
MOUNTED HOOK**

Suspend your High Bay or purchase an optional Mounting Bracket

**ALUMINIUM
DIE-CAST
HEAT SINK**

Prevent the driver and LEDs from overheating and keep your High Bay cool

**MICROWAVE SENSOR
AND PIR SENSOR
OPTIONS
AVAILABLE**

Choose between a Microwave Sensor with a 0, 10 or 25% Standby Mode with 15m detection range, or a PIR Sensor with 6m detection range

**IP65 AND IK10
RATED HOUSING**

Protect your High Bay from water, dust and impact with its durable and highly transparent PC cover

**120° LEDs WITH
OPTIONAL 60°
OR 90° LENS**

Provide a broad, even distribution of light with the optional lenses enabling a more narrow beam if required