


YAXLEY SLIM CIRCULAR TRI-COLOUR IP65 14W/20W MICROWAVE SENSOR SELF

NET-33-06-29



Features & Benefits

- Self Test Emergency function
- 0%, 10% or 25% Standby Mode
- Dual Wattage driver allows a choice between 14W or 20W
- Selectable 3000K, 4000K or 5500K colour temperature
- IP65 rated housing
- Polycarbonate housing and diffuser

Key Data

| | |
|--------------------|---------------------------------|
| Power | 14W/20W |
| Luminous Flux | 1440lm/2000lm |
| Colour Temperature | 3000K/4000K/5500K |
| IP Rating | IP65 |
| Dimensions | ø470 x 92mm |
| Warranty | 5 Years (Registration Required) |

Compatible Accessories

| | |
|--------------|--|
| NET-33-06-04 | Matte Black Ring Accessory for Yaxley Slim Circulars |
| NET-33-06-02 | Chrome Ring Accessory for Yaxley Slim Circulars |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk




ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|---|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.9 |
| Luminaire Efficacy | 100lm/W |
| LED Manufacturer | Jingrui |
| LED Type | SMD 2835 |
| No. of LEDs | 156 |
| Driver Manufacturer | Tridonic Advanced Series |
| Driver Output Voltage (DC) | 36-42V |
| Total Circuit Power (W) | 14W/20W +/- 1.5W |
| Electrical Class | 2 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 115° |
| Dimmable | No |
| Operating Temp. | 0°C to +45°C |
| Lifespan LM80 | 50,000 Hours |
| UGR Rating | More than 19 |
| Weight | 2.01Kg |
| Manufacturer | NET LED Lighting |
| Fire Rating | V2 |
| Luminous Flux Factor | 21%/15% |
| Recharge Period | 24H |
| Self Test | Yes |
| Housing Colour | White |
| Housing Material | Polycarbonate |
| Battery Pack | LiFePO4 |
| Diffuser Material | Polycarbonate |
| Dimming Input Type | one4all Dimming - DALI 1 & 2 and switchDIM (Push) |
| Emergency Kit | 1 Year Warranty |

Other Options

| Description | | |
|-----------------------|--------------|---|
| Emergency Pack | NET-33-06-21 | Streamer Yaxley Slim Circular Tri-Colour IP65 14W/20W Standard |
| Emergency Pack | NET-33-06-22 | Merrytek Yaxley Slim Circular Tri-Colour IP65 14W/20W Emergency |
| Emergency Pack | NET-33-06-23 | IP20 Yaxley Slim Circular Tri-Colour IP65 14W/20W Self Test Emergency |
| Standby Dimming Level | NET-33-06-24 | 0% / 10% / 25% Yaxley Slim Circular Tri-Colour IP65 14W/20W Microwave Sensor |
| Corridor Function | NET-33-06-27 | Yes Yaxley Slim Circular Tri-Colour IP65 14W/20W Microwave Sensor Emergency |
| | NET-33-06-38 | Yaxley Slim Circular Tri-Colour IP65 20W Dimmable one4all |
| | NET-33-06-39 | Yaxley Slim Circular Tri-Colour IP65 20W Dimmable Emergency |
| | NET-33-06-26 | Yaxley Slim Circular Tri-Colour IP65 20W Dimmable Self Test Emergency |
| | NET-33-06-28 | Yaxley Slim Circular Tri-Colour IP65 20W Dimmable DALI Emergency |
| | NET-33-06-29 | Yaxley Slim Circular Tri-Colour IP65 14W/20W Microwave Sensor Self Test Emergency |

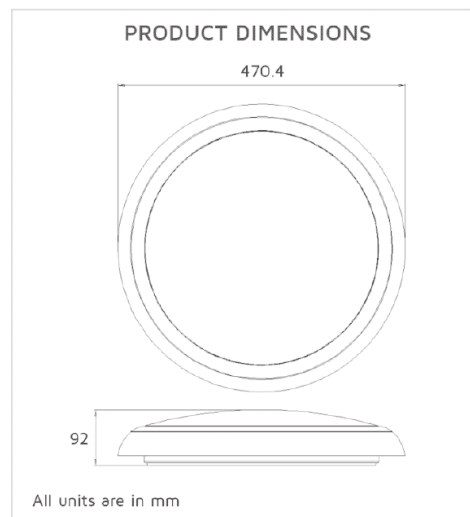

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

SHATTERPROOF POLYCARBONATE DIFFUSER

Designed to prevent the diffuser shattering into small, indistinct pieces



SELECTABLE COLOUR TEMPERATURE

Choose your colour temperature 3000K, 4000K or 5500K

TRIDONIC PREMIUM DIMMABLE DRIVER

Customise lighting levels and reduce electricity consumption

Dimmable options only

IP65 RATED GASKET

Protect your fitting from water and dust

HINGED GEAR TRAY

Get easy access to wiring and components



HIGH OUTPUT EMERGENCY OPERATION

Ensures the fitting comes on in the event of a power failure

Emergency options only

0, 10 OR 25% STANDBY MODE

Reduce unnecessary energy consumption by avoiding lighting in areas that don't need it

Microwave Sensor options only

PUSH CONNECTOR

Reduce installation time with easy-to-use push fit terminals